
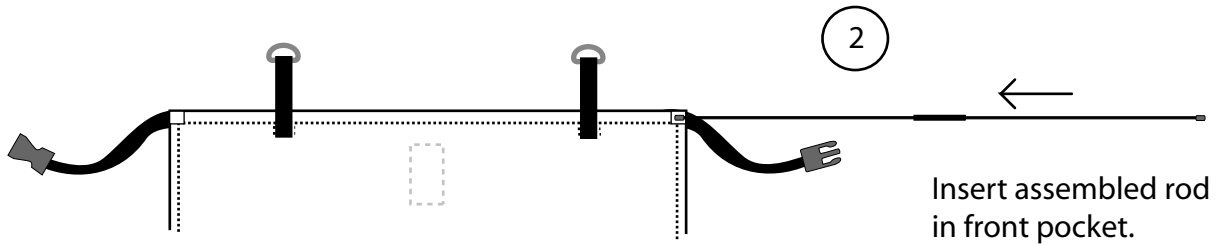



Self-Support Hatch Umbrella Installation

Insert fiberglass rod ends together.




Bend the rod and insert clips to form a half-moon shape. Rod ends must be inside the half-moon.

>>>DO NOT BEND TOO MUCH AS THE COUPLING MAY BREAK
Drop the assembled umbrella on the hatch and adjust clip for best height.

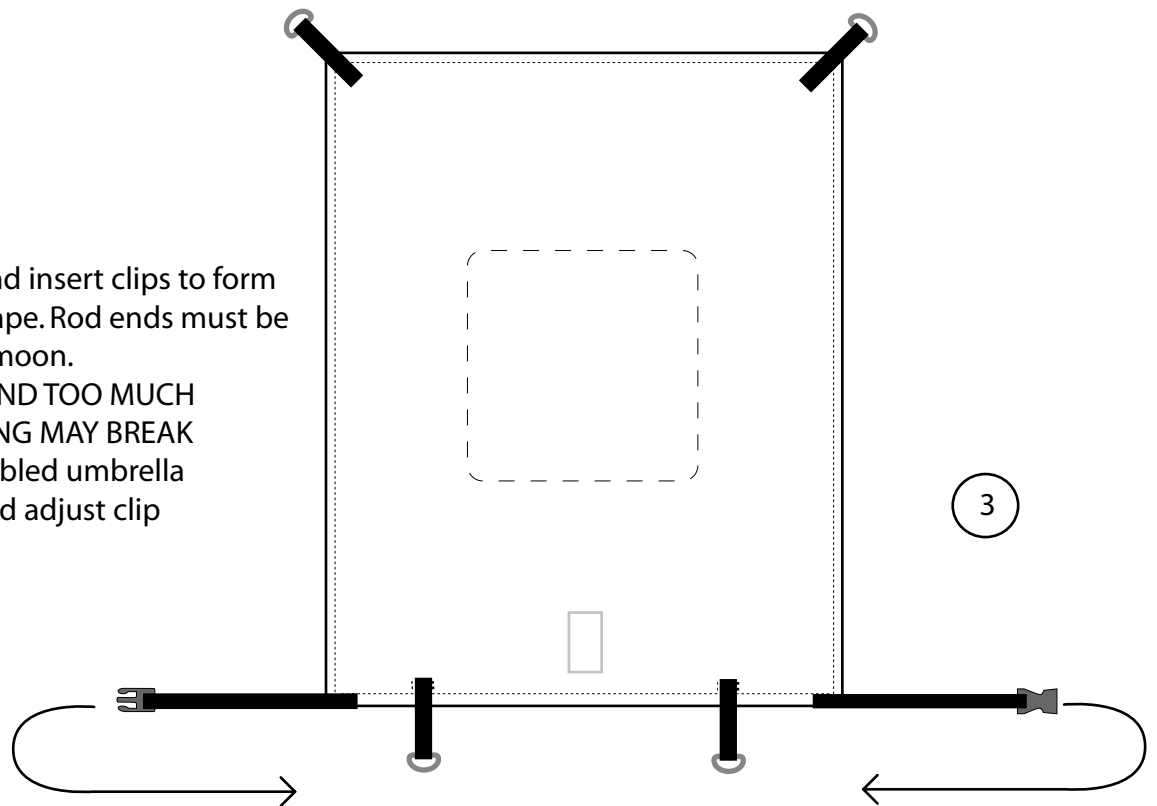

Fix small gauge ropes (not included) at corners and front D-rings. Fix ropes at siderails, stantions, lifelines or pulpit.

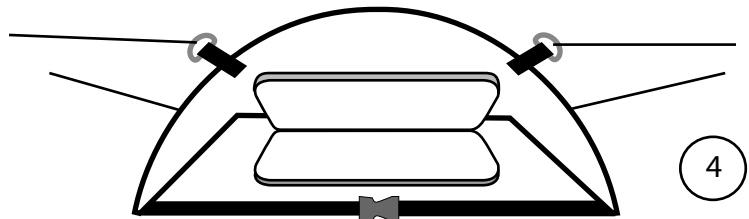

Do not store wet, let umbrella dry completely.
Release clips, remove the rod by pulling both ends and fold.